


HYDRA 14 4P

OUR REACH



★ Head Office ▲ 17 Business Center ● 73 Dealers 825+ Customer Touch points (CTP)

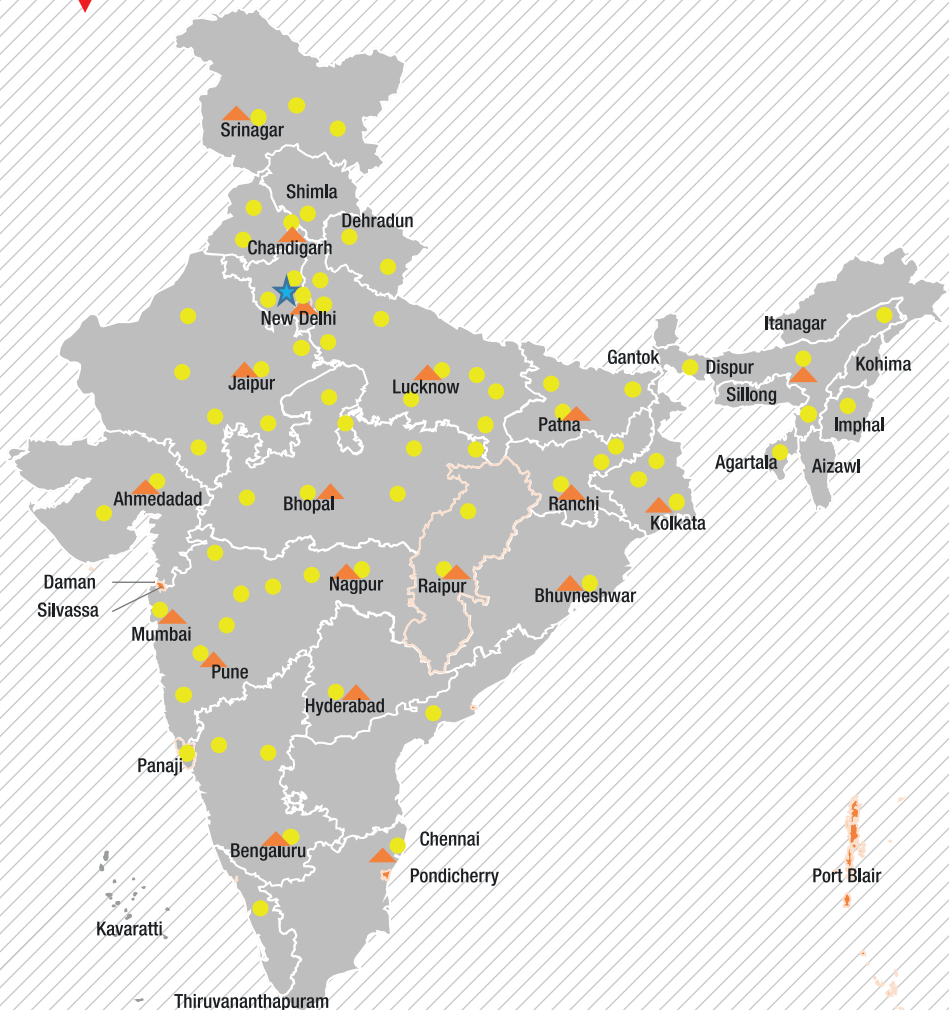

Toll Free No.:
1800-180-4488
(Timings: 9.30 am - 6.00 pm, Monday to Friday)

e-mail: eklg_ece.marketing@escortskubota.com

Escorts Kubota Limited (Construction Equipment)
Plot No. 219, Sector-58, Ballabhgarh- 121 004, Faridabad, Haryana (INDIA)
Tel.: 0129-2306574/2306598/2306571
Fax: 0129-2306572 Website: www.escortsgroup.com



Download Customer App
for more details

Authorised Dealer

MKT/23.1/Hydra 14 4P

(Accessories as shown in the picture may not be the part of standard fitment and are subject to change without prior notice.)

HYDRA 14

4P



Capacity
14 t



Hoist
6 Fall



Service Interval (Engine)
500 h




Straight Axle
Heavy Duty



Structure
Robust

• The information contained in this leaflet is intended to be of a general nature only. • We reserve the right to changed specifications without notice. • All Dimensions and weights are variable within +/-5%.

HYDRA 14 ●

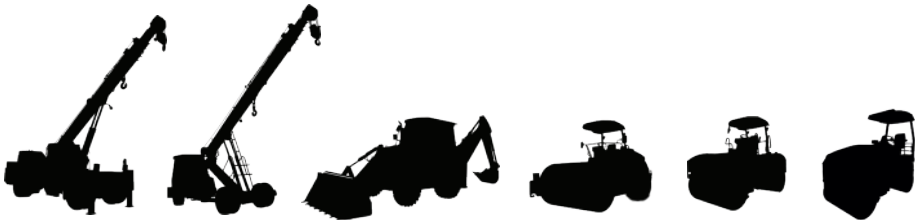

HYDRA 14

SPECIFICATIONS



RATED CAPACITY

14 tonne	1.6 m radius
1.2 tonne	12.4 m radius



ENGINE

Make & Model Escorts AE 4.312C-3A four cylinder, water cooled diesel engine developing 49.5 HP @ 2200 RPM or equivalent

*500 h service interval available in escorts engine.



TRANSMISSION

Drive	2 Wheel drive
Type	Heavy duty transmission developed especially for crane application. Constant mesh gearbox coupled with robust straight drive axle. Eight forward and two reverse speeds with high/low selector lever
Creep Speed	1.9 km/h ideal for crane operation
Max. Speed	29 km/h (unladen)
Clutch	Heavy duty clutch, wire woven, asbestos free



STEERING

Type	Articulated power steering, hydraulically controlled through 2 double acting jacks
Articulation	Up to 50°
Turning Radius	6.75 m



HOIST MECHANISM

Hoist	Hydraulic winch. Six falls (Winch capacity 12 t). Rope dia 13 mm
-------	--



BRAKES

Front Wheel	Pneumatic assisted hydraulic brakes
Rear Wheel	Disc brakes actuated through a slave cylinder
Parking	Hand control valve operated, Air assisted Hydraulic parking brakes at all wheels (Standard models) Hand control valve operated, Air assisted Parking brakes at Front wheels (with Air brake models)



HYDRAULIC SYSTEM

Pump	Vane type hydraulic pump
Control Valve	4 spool control valve with built in pressure relief valve and precision control
Hydraulic Filter	Suction line has a 100 mesh in line strainer while return line has 25 microns full flow filter



ELECTRICAL SYSTEM

Type	12 V Single battery, Negative earth
------	-------------------------------------



CAPACITIES

Fuel Tank	38 l
Hydraulic Tank	65 l



TRACK

Front	1 980 mm
Rear	1 680 mm



OVERALL DIMENSIONS

Length	11 900 mm
Width	2 550 mm
Height	3 100 mm



OPERATING WEIGHT (KG)

Gross Vehicle Weight	11 200 kg
----------------------	-----------



BOOM

Telescoping	4 parts, 3 parts hydraulically powered & fully synchronized, 4 th part power extended & manually pinned
Derricking	Through double acting jacks



TYRES

Front	11.00 X 20 -16 PR (4 number), inflation pressure 110 — 115 PSI
Rear	13.00 X 24 -12 PR (2 number), inflation pressure 35 PSI. Water ballasted



SAFETY SYSTEM

- Rope compensation for auto leveling
- Overload audio warning system
- Hose protection failure device
- Safety brakes on hoist
- Cylinder guard for protection
- System Low air pressure warning buzzer



STANDARD ACCESSORIES

- All Weather Cabin
- Lift Cylinder Guard
- Turn & Reverse Lamp
- Front Bumper
- Rear View Mirror
- Reflectors



OPTIONAL ACCESSORIES


- Fly Jib
- Tool Box
- Spark Arrestor
- Fire Extinguisher
- Safe Load Indicator
- 14 x 24 Heavy Duty Tyres
- Air Brakes on Front Wheel
- Over Hoist & Hydraulic Cutoff Kit
- Sai Winch

HYDRA 14 4P

LOAD CHART HYDRA 14 4P

USE:-6 FALL ROPE
MANUAL EXTN 'IN'

USE:-4 FALL ROPE
MANUAL EXTN 'OUT'

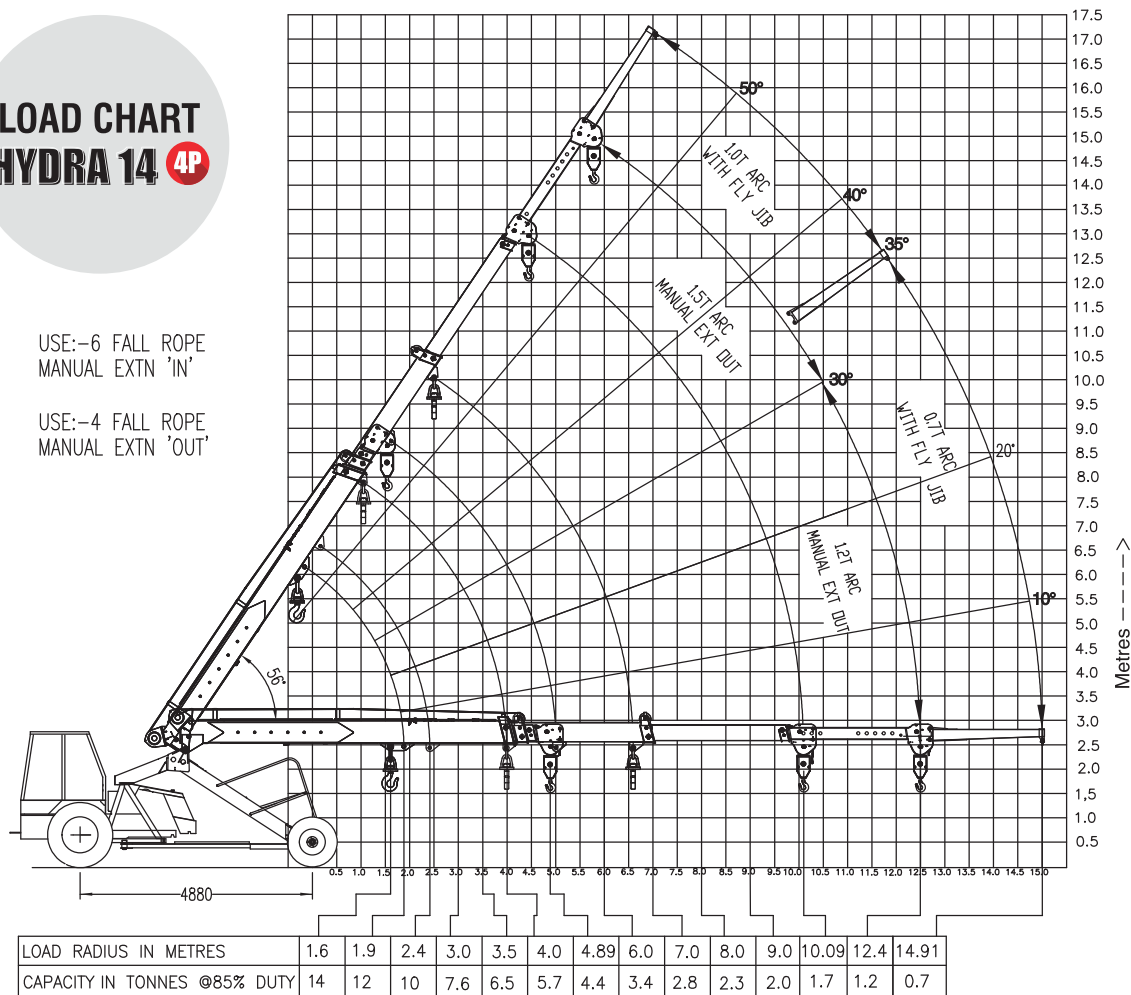


Rated loads are calculated for operation on leveled surface.

FEATURES



SLOTTED BOOM AND ROPE

Compensation for precision handling & auto leveling of loads.



TRANSMISSION

Heavy duty straight axle with constant mesh transmission.



CABIN

Ergonomically designed spacious cabin with modern dashboard for utmost operator comfort and operation.



HYDRAULIC WINCH OF 12T

Capacity with 6 falls snatch block for precision handling & low maintenance.



ENGINE

Escorts Engine BS-III (CEV compliant) - high on power/torque & low on fuelconsumption & maintenance.



REAR BREAKES

Disc brakes at the rear for effective braking.