




FROM INDIA 
TO THE WORLD

The Next Generation of SCHWING Self Loading Mixer

Built for Speed. Engineered for Strength. Designed for Every Site.



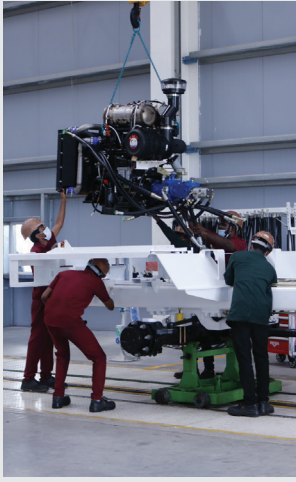

Built for the New Era of Construction

The new generation of SCHWING Self Loading Mixers is designed to match today's construction demands—more output, less fuel, and cleaner performance.

Powered by the latest CEV Stage V (BS5) engine, our machines are more fuel-efficient, produce lower emissions, and meet government norms for green construction. That means more savings, smoother operation, and better performance at every site.

With SCHWING Stetter's trusted quality and nationwide support, you get a mixer that's ready for any challenge—day after day.

Why SCHWING SLM?

- CEV Stage V Engine – Less Fuel, More Work
- Stronger Drum, Longer Life
- Accurate Batching, Zero Wastage
- Drives Anywhere, Works Everywhere
- More Concrete in Less Time
- Easy to Operate, Easy to Maintain
- Upto 240° Drum Rotation for Easy Pouring
- Trusted German Engineering, Made in India

Technical Sheet

NEW!	UNIT	SLM BEE 2.1	SLM 2100	SLM 2600	SLM 4300	SLM 4600	
ENGINE							
Available Engine	KOEL	hp(kW)	49.5 (36.3)	49.5 (36.3)	74.5 (54.64)	110(80.68)	110(80.68)
	Mahindra	hp(kW)	-	-	74.8 (55.78)	112(83.52)	112(83.52)
Transmission		4 speed automotive type					
MIXER							
Concrete Batch Volume	m ³	2.1	2.1	2.6	4.3	4.6	
Drum slewing	Degree	-	216	216	255	255	
Drum rotation	rpm	0 to 21	0 to 21	0 to 21	0 to 21	0 to 21	
Loading shovel	Liter	380	415	415	600	600	
Water tank capacity	Liter	380	380	380	750	750	
Vehicle speed max.	km/hr	22	22	27	29	29	
Gradeability	Degree	28° (54%)	28° (54%)	24° (44%)	24° (44%)	24° (44%)	
Steer drive axle	-	4 Speed automotive type, Integrated 2 stage reduction gearbox					
Brake	-	Dual brake circuit with Power Assisted Hydraulic Brake					
Steering system	-	Hydrostatic steering (Fully Powered)					
Weight unladen**	kg	6140	6760	7065	9370	9560	
DIMENSION							
Length	mm	4760	4890	4703	5870	5870	
Width	mm	2160	2172	2172	2440	2440	
Height	mm	3350	3520	3493	4100	4100	

** Weights may vary ± 10% * At 'ZERO' degree ground level

OPTIONS

- GPS system
- Rear / loading view camera
- Ground control operation
- Admixture system
- Centralized hand operated greasing system
- Cold start kit
- Hydraulic wet braking system
- Internet of Things (IoT)

For more complete information on SCHWING's products, services and industry solutions, visit us at www.schwingstetterindia.com
Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment.
See your SCHWING's Branch/dealer for available options



SCHWING Stetter India Private Limited

Regd., Corporate Office & Works: F71, Sipcot Industrial Park,
Irungattukottai, Sriperumpudur, Kancheepuram,
Tamil Nadu - 602117, India
Tel No./WhatsApp: - +91-9176606120
Email: - enquiry@schwingstetterindia.com

Your Nearest Branch :

