



Atlas Copco



The ready to go range

The 8 Series. What do you tow?

Introducing the 8 Series

The 8 Series compressor range is the result of over a decade of continuous development. For the first time, it's possible to transport behind a normal passenger car, with no special driving license, a compressor that can produce up to 5 m³/min of air, with a full size fuel tank, aftercooler and generator all incorporated into a compact and lightweight package.

This is all made possible by the latest development in our pioneering air element design, we can produce a compressor up to 150 kg lighter than comparable models. However, we understand that this means nothing without efficiency. Efficiency can mean many things, such as reduced service time, fuel consumption or increased utilization. The 8 Series ticks all the boxes when it comes to delivering outstanding performance in all of these categories.

Lastly, depending on your application you might ask about robustness, durability, ruggedness or toughness – we have one simple word for all of the above – The HardHat®. This legendary canopy was born in 2005 and the 8 Series features the latest, toughest design.

The amazing 8 Series, it's all about the numbers, it's all about changing the game and we have one clear challenge to you – **what do you tow?**

Better together

One small 8 Series compressor can power two RTEX breakers.



red**dot** design award
winner 2017

Atlas Copco



8 standard features





TECHNICAL DATA



Performance		XAS 38	XAS 48	XAHS 38	XAS 58	XAS 68
Working pressure	bar (g)	7	7	12	7	7
	psi (g)	100	100	175	100	100
Max. free air delivery	m ³ /min	2	2,5	2,3	3	3,5
	cfm	70	90 (108*)	81	106	125
Output power	kVA	-	-	-	-	-
Max. ambient temperature at sea level	°C	50	47 (43*)	50	50	50
Min. starting temperature / (cold start Aid)	°C	-10 / -20	-10 / -20	-10 / -20	-10 / -20	-10 / -20
Engine						
Model		KUBOTA D 722	KUBOTA D 902	KUBOTA V 1505	KUBOTA V 1505	KUBOTA V 1505
Number of cylinders		3	3	4	4	4
Power output @ normal shaft speed	kW	14,9	18,5	26,5	26,5	26,5
Nominal speed	rpm	3400	3400 (3600*)	3000	3000	3000
Unload speed	rpm	2000	2000 (2200*)	1800	1850	1850
Capacity						
Engine oil	l	3,8	3,8	5,5	5,5	5,5
Compressor oil	l	6	6	8	8	8
Fuel tank capacity	l	28,5	28,5	60	60	60
Noise level						
Sound power level (LwA)	dB(A)	97	98 (99*)	98	98	98
Sound pressure level (LpA) at 7m	dB(A)	70	70 (71*)	70	70	70
Dimensions and weight (box unit / undercarriage)						
Length	mm	1570 / 1960	1570 / 1960	1940 / 2290	1940 / 2290	1940 / 2290
Width	mm	1060 / 1230	1060 / 1230	1180 / 1350	1180 / 1350	1180 / 1350
Height	mm	990 / 1250	990 / 1250	1150 / 1400	1150 / 1400	1150 / 1400
Weight (box/portable)	kg	440 / 500	440 / 500	650 / 749	650 / 749	650 / 749

*Values in brackets for non-European models



AVAILABLE OPTIONS INCLUDE:

- Adjustable towbar with brakes
- Adjustable towbar without brakes
- Fixed towbar with brakes
- Fixed towbar without brakes
- DoT approved undercarriage
- Support mounted
- Support leg
- Jockey wheel
- Road signalization + wheel chocks
- Towing eye (DIN, NATO, AC, ITA, GB , Ball coupling)
- Loose ball coupling
- Special colours
- Cold start
- Toolbox
- Aftercooler + water separator
- Aftercooler + water separator + reheater
- Aftercooler by-pass
- Additional fuel filter
- Safety cartridge (standard on XAS 38 and XAS 48)
- Lubricator
- Non-return valve
- Hose reel
- LED lights
- Refinery equipment (XAHS 38 and up)



Atlas Copco

XATS 68	XAS 78	XAS 88	XAS 48 G	XAS 68 G	XAS 88 G
10,3	7	7	7	7	7
150	100	100	100	100	100
3,5	4,5	5	2,5	3,5	5,0
125	160	175	90	125	175
-	-	-	6 (12,5)	6 l 12,5	9
50	50	50	50	50	50
-10 / -20	-10 / -20	-10 / -20	-10 / -20	-10 / -20	-10 / -20
KUBOTA V 1505 T	KUBOTA V 1505 T	KUBOTA V 1505 T	KUBOTA V 1505 (T)	KUBOTA V 1505 T	KUBOTA V 1505 T
4	4	4	4	4	4
33	33	33	26,5 (33)	33	33
3000	3000	3000	3000	3000	3000
1850	1850	1850	1850	1850	1850
5,5	5,5	5,5	5,5	5,5	5,5
8	8	8	8	8	8
60	60	60	60	60	60
98	98	98	98	98	98
70	70	70	70	70	70
1940 / 2290	1940 / 2290	1940 / 2290	1940 / 2290	1940 / 2290	1940 / 2290
1180 / 1350	1180 / 1350	1180 / 1350	1180 / 1350	1180 / 1350	1180 / 1350
1150 / 1400	1150 / 1400	1150 / 1400	1150 / 1400	1150 / 1400	1150 / 1400
650 / 749	650 / 749	650 / 749	650 / 749	650 / 749	650 / 749

*Values in brackets for non-European models

ISO STANDARDS

Atlas Copco's fully implemented Quality Management and Environmental Management systems in the design and manufacturing of these units fulfill the requirements of ISO 9001 and ISO 14001 & OHSAS 18001. The range has also been given the certificate tested according to ISO 1217:2009-annex D.



8 step simple service

1

Draining
all liquids



Centralized
draining point

2

Drain and replace com-
pressor oil



Accessible drain point
below vessel

3

Drain and replace
engine oil



Easy inlet pour

4

Replace engine
air filter



Easy clip
in changeable filter

5

Replace compressor
air filter



Easy clip
in changeable filter

6

Replace engine
oil filter



Easily
accessible spin on
engine oil filter

7

Replace compressor
oil filter




Easily
accessible spin on
compressor oil filter

8

Replace compressor
separator element



Easily
accessible spin on
separator element

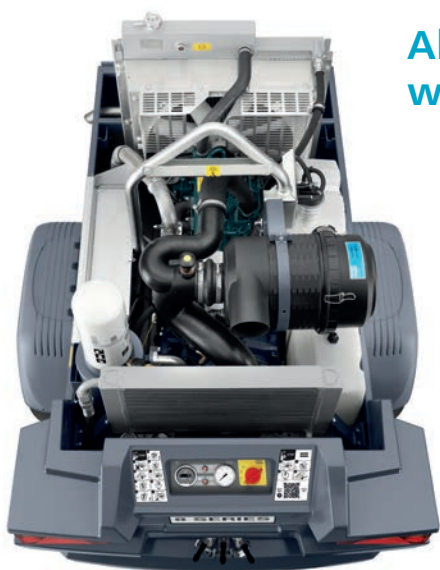

All this can be done in minutes – not hours,
with no special tools needed

Want a guaranteed
service cost? Ask
about our 8 plan.

2 OR 3
YEAR PLAN

LESS
THAN
1€
PER
DAY

Atlas Copco

It's all about the numbers



red**dot** design award
winner 2017

LIGHTER THAN
COMPARABLE
MODELS  **150 kg**

10 MODELS
FLOWS FROM
⇒ **2-5 m³/min** ⇒

1 COMPLETELY
NEW 
SCREW ELEMENT

StageV
COMPLIANT

 **12%**
FUEL **EFFICIENT**

UNDER 60 
MINUTES
SERVICE TIME

OIL SERVICE
ONCE IN 2
 **YEARS**

EVERY MODEL BELOW
750 kg
With full fuel tank, generator and
aftercooler, ZERO extra driving
licenses needed to tow ANY model

15% 
SMALLER
FOOTPRINT

11 YEARS
DEVELOPMENT
HARDHAT
CANOPY 

 **100%**
GUARANTEED
BUY-BACK **VALUE**

Power Technique Solutions Portfolio

Atlas Copco's Power Technique Business Area has a forward-thinking philosophy. For us, creating customer value is all about anticipating and exceeding your future needs – while never compromising our environmental principles. Looking ahead and staying ahead is the only way we can ensure we are your long term partner.

Air compressors

Ready to go



- 1-5 m³/min
- 7-12 bar

Versatility



- 5.5-22 m³/min
 - 7-20 bar
- *Diesel and electric options available

Productivity partner



- 19-116 m³/min
- 10-345 bar

Handheld tools

Pneumatic tools



- Breakers (2.5 – 40 kg)
- Rockdrills (5 – 25 kg)
- Underground Rockdrills
- Additional Air Tools

Hydraulic tools



- Breakers (11 – 40 kg)
- Additional Hydraulic Tools
- Powerpacks

Petrol engine driven tools



- Breakers & Tie Tampers (25 kg)
- Combi Drills (23 Kg)

Generators



- Portable
- Mobile
- Industrial

*Multiple configurations available to produce power for any size application

Light towers



- Diesel LED and MH
- Electric LED
- Battery LED

Dewatering pumps



- Submersible
- Surface
- Small portable

*Diesel and electric options available

Photos and illustrations contained herein might depict products with optional and/or extra components which are not included with the standard version of the product and, therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice. Not all products are available in all markets.



Atlas Copco Power Technique
atlascopco.com/ptba